



Certified



Fillable




Custom Logo



Dials

FEATURES / BENEFITS

- Quick Connect Tri-Clamp® Design
- Fast Removal and Installation of Instruments, to Allow Flushing or Changing the Process Media
- Ideal for Clean-in-Place, or Equipment Washdown
- Designed to Meet 3-A Sanitary Standards
- Comes Standard with 3-A Certification
- All Welded 316SS Tube, Socket, Seal, and Diaphragm

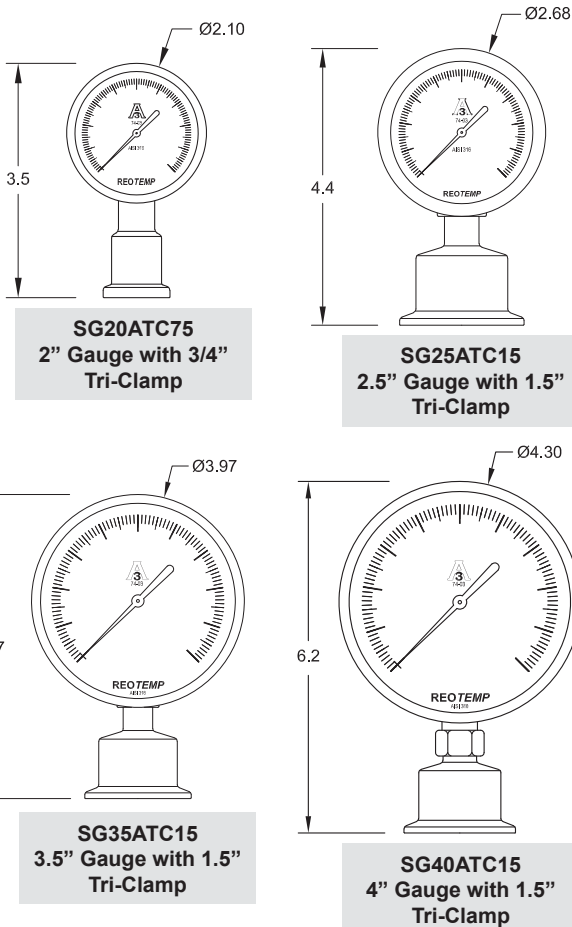

SPECIFICATIONS

Accuracy (1" & Larger Tri-Clamp)	±1.5% for 100 psi and Above ±2% for Vacuum, Compound and <100 psi
Accuracy (3/4" Tri-Clamp)	±2.5% Upscale ±4% Downscale
Ambient Limits	-40°F/150°F* (-40°F/250°F* with Dry Case and Polysulfone Lens with Weep Hole)
Process Limits	-40°F/400°F* (-110°F/750°F* Available with Cooling Tower or Capillary)
Wetted Materials	Body: 316SS Internal Parts: 316SS Wetted Surface Finish: 18-24 Ra
Lens	Plastic (Standard), Laminated Safety Glass, Tempered Safety Glass or Polysulfone
Other Materials	Case: 304SS Dial: White Aluminum, Black Letters
Fillable	Yes, All Models Except SG20
Maximum Working Pressure	Stable = 100% Momentary = 130% of scale
Environmental Protection	NEMA 4X/IP65

*3/4" Tri-clamp changes both ambient and process temp limits to 20°F/150°F.