


PART NO.	O.D.	I.D.	OAL	A
14WHR-.125	.125	.062	1.25	.720
14WHR-.25	.250	.125	1.00	.720
14WHR-.50	.500	.370	1.50	1.000
14WHR-.75	.750	.620	1.50	.900
14WHR-1	1.000	.870	1.687	.900
14WHR-1.5	1.500	1.370	1.687	.900
14WHR-2	2.000	1.870	2.312	.900
14WHR-2.5	2.500	2.370	2.000	.900
14WHR-3	3.000	2.870	3.093	1.260
14WHR-4	4.000	3.834	3.406	1.620
14WHR-6	6.000	5.782	2.125	1.700
14WHR-8	8.000	7.782	2.000	1.300

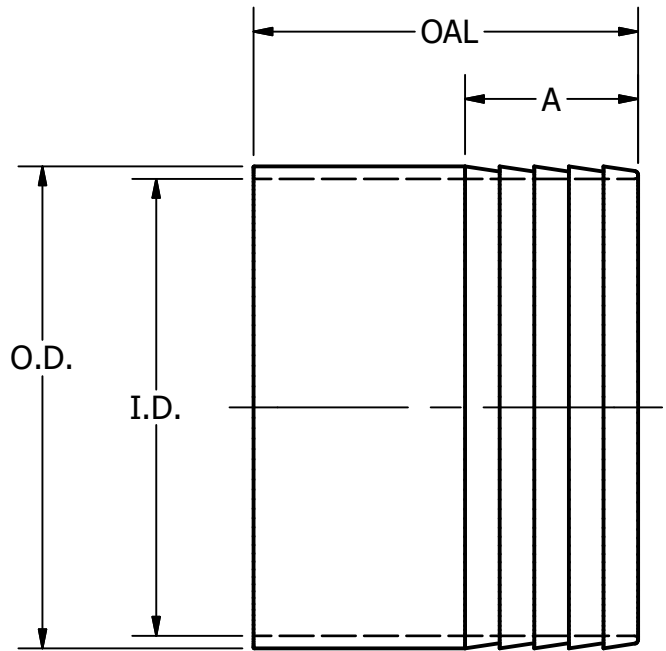

TOLERANCES	<b>Steel &amp; O'Brien Mfg. Inc.</b>	
REFER TO STEEL & O'BRIEN DOCUMENT # QS121	TITLE BW X HOSE BARB	
	DWG NO: <b>14WHR</b>	REV
	SCALE: N/A	SHEET 1 OF 1